



TILE & STONE FIXING EXPERT



T07 & T08

EXTROFIX ADHESIVE

ADHESIVE FOR FIXING
EXTERNAL TILES, NATURAL STONES
AND GLASS MOSAIC



For Internal
& External
Floor & Wall



For
Wet & Dry
Area



Highly
Flexible



Extended
Open Time



Superior
Bond
Strength



Low VOC



Grey



White



Available in 20 kg pack.



EXTROFIX ADHESIVE

DESCRIPTION

Roff Extrofix Adhesive is a highly polymer modified, thin-set tile adhesive for fixing for all type of tiles, mosaics and natural stones, on a variety of surfaces, for both vertical and horizontal application, in dry as well as wet areas for indoor as well as outdoor application. It can be used to fix regular size tile in commercial area as it accommodates shocks due to heavy traffic.

AREA OF USE

Material to be fixed	On surface/ substrate	Area of application
All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, glass mosaic tiles, large format tiles, precast terrazzo, marble & natural stones, low thickness slabs.	Cement-based screeds/ bed, gypsum & cement based plasters/ renders, concrete surfaces & bricks, existing tiles & stones, other cement-based surface, waterproofing products, drywall like cement /bison/ gypsum boards*.	Floor and walls, for internal area, for external area*, dry & wet area like saunas, spa, fountains, swimming pools etc., Terraces & balconies, domestic applications, commercial applications.

*For all external wall tile/ stone fixing & drywall tile installation, Consult with Roff technical team.

FEATURES AND ADVANTAGES

- Easy to use – just add water on site, ready to use.
- Highly Polymer modified – provides high structural adhesion, allows bonding on variety of substrates, for fixing variety of tiles and stones.
- Long open time – suitable for large format & external condition.
- Sag Resistant formula – provides hassle-free application on vertical walls.
- Water & shock resistant – suitable for wet areas & commercial floor too.
- Flexible adhesive – allows to sustain minor vibration in substrate.
- Sustains heat ageing – ideal for high temperature locations like outdoor use, Jacuzzi, sauna etc.
- Low VOC – for healthy living.

LIMITATIONS

- Do not apply directly to other drywall partitions of plywood & wood derivatives, decorative laminates, metal, plastic, highly deformable surfaces subject to vibrations. Use Masterfix as per application.
- Adhesives for ceramic tile, bricks and stone are not designed as replacements for waterproof coating. Use Roff waterproofing coating before tiling for wet area.
- Do not use for fixing artificial/ nano/ engineered stone/ composites/ metal tile. Use Masterfix for the same.



EXTROFIX ADHESIVE

TECHNICAL INFORMATION

APPLICATION PROPERTIES

Testing Properties	Test Results
Tentative Mixing Ratio (Powder : Water)	Grey - 1: 0.28 by weight White - 1: 0.32 by weight
Mixed Density	1.65 ± 0.05 kg/ litre
Open Time	Min. 30 minutes
Adjustability	Approx. 35 minutes
Pot Life	Approx. 120 minutes
Sag/ Slip	≤ 0.5 mm
VOC Content (As per EPA 24 method)	< 2 gm/ kg
Application Temperature (Substrates and Materials)	5°C to 35°C
Adhesive Thickness	3 - 12 mm
Setting/ Trafficable/ Grouting Time	24 hours

PERFORMANCE PROPERTIES AS PER ISO 13007 AND EN 12004 (C2TES1)

Testing Properties	Requirement	Test Results
a) Tensile Adhesion Strength, after 28 days	≥ 1.0 N/mm ²	> 1.5 N/mm ²
b) Tensile adhesion strength after water immersion	≥ 1.0 N/mm ²	> 1.0 N/mm ²
c) Tensile adhesion strength after heat ageing	≥ 1.0 N/mm ²	> 1.5 N/mm ²
d) Tensile adhesion strength after freeze-thaw cycle	≥ 1.0 N/mm ²	> 1.0 N/mm ²
e) Slip resistance	≤ 0.5 mm	< 0.5 mm
f) Extended open time (at 30 minutes)	≥ 0.5 N/mm ²	> 0.5 N/mm ²
g) Transverse deformation (S1)	≥ 2.5 mm, < 5 mm	3.3 mm

PERFORMANCE PROPERTIES AS PER IS 15477: 2019 (TYPE 3 'T')

Testing Properties	Requirement	Test Results
a) tensile adhesion at dry condition, after 28 days	≥ 1.5 N/mm ²	> 1.5 N/mm ²
b) Tensile Adhesion at Wet condition	≥ 1 N/mm ²	> 1.0 N/mm ²
c) Shear Adhesion at Dry Condition	≥ 1.5 N/mm ²	> 1.5 N/mm ²
d) Shear Adhesion at Wet condition	≥ 1 N/mm ²	> 1.0 N/mm ²
e) Shear Adhesion at Heat Ageing	≥ 1 N/mm ²	> 1.5 N/mm ²
f) Transverse deformation (S1)	≥ 2.5 mm, 5 mm	3.3 mm
g) Slip resistance	≤ 0.5 mm	< 0.5 mm

Note : Test results are indicative as per testing method specified in standard. Test results may vary as per substrate, site condition & testing machine etc. Actual field performance will depend on installation methods and site conditions.

EXTROFIX ADHESIVE

APPLICATION INSTRUCTIONS




SUBSTRATE PREPARATION

- The substrate must be level, cured, undamaged, compact, rigid, resistant, dry and free from any debonding agents and from damp rising.
- All surfaces must be plumb and true to within 6 mm in 10 ft (3m).
- Dry, dusty surfaces should be dampened with water & excess water should be swept off.
- New concrete slabs shall be damp cured and 28 days old before application which will reduce the shrinkage from tile fixing surface.
- Expansion joints to be provided & filled with suitable sealant.
- Do not cover expansion joints with thin set tile adhesive/ tile.

MIXING

- Add 3 – 3.5 parts of powder to 1 part of water or 5.5 – 6.5 litre water for 20 kg powder in a clean mixing vessel.
- Adjust the water as per desired consistency.
- Mix with a suitable mechanical stirrer or slow speed drills (50 – 100 rpm) until a lump free homogeneous paste is obtained.
- Always mix required quantity, which can be consumed within pot life.
- Leave mixture for 5 minutes before use.
- No further water should be added.

APPLICATION

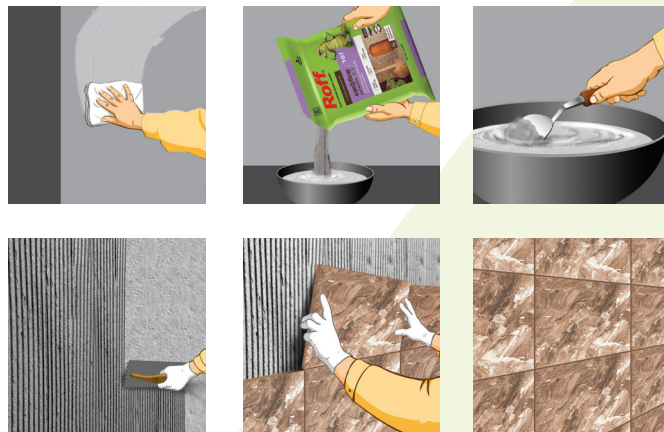

- Apply adhesive to the substrate with the flat side of the trowel.
- Comb on additional adhesive with the notched side.
- Use the proper sized notched trowel to ensure full bedding of the tile.
- Tiles must be fixed within 30 minutes of adhesive being applied, depending on the porosity of the surface and atmospheric conditions.
- Check the adhesive ribs periodically and if a skin has formed, remove the dried adhesive and apply fresh adhesive.
- Press the tiles firmly into position with a slight twisting action, checking periodically that good contact is maintained with the back of each tile and beat in using rubber mallet to imbed tile and adjust level.
- Leave no voids behind tiles.
- For large size tiles or irregular surfaces, adhesive can additionally be buttered on the backs of the tiles to ensure full adhesive contact.
- Use suitable support along with adhesive for fixing tiles on vertical surfaces.
- For highly absorbent natural stones which may form a wet patch when adhesive is used, it is recommended to use suitable Roff Impregnating sealer on all sides. Please refer Technical Data Sheets of product intended for use for specific instructions of use.
- Leave adequate joints between individual wall and floor tiles using Roff spacers. The joint width shall be as per the recommendation of architect / engineer.
- Clean off surplus adhesive from the tile face and between joints.
- Clean tools and tile work with water while adhesive is fresh.



EXTROFIX ADHESIVE

PRECAUTIONS & NOTE

- Always add powder to water.
- Do not add excess water than recommended.
- Never add sand & cement at site.
- Do not use on wet screed. Surface must be fully cured.
- Do not use the adhesive to correct surface irregularities greater than 15 mm.
- Protect from direct rainfall/ foot traffic for at least 24 hours.
- Leave gap between the tile & fill gaps with Roff tile grout
- Designer/ applicator must evaluate the use of an additional mechanical fastening system for extra security for high height (such as steel hooks fastened to the substrate).

COVERAGE

- Approx. 5 - 6 m²/ 20 kg Bag at 3 mm thickness (using 6 mm x 6 mm notch).
- Approx. 2.5 - 3 m²/ 20 kg Bag at 6 mm thickness (using 12 mm x 12 mm notch).
- Approx. 1.2 kg/ m² per mm of thickness.

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

PACKAGING

20 kg bag

SHELF LIFE

12 months for sealed pack when stored under cover, out of direct sunlight, dampproof condition and protect from extremes of temperature.

GROUTING

Grouting should be carried out after 24 hours of tiling. Use the appropriate grouting material from Roff range of cementitious and epoxy grouts.

SAFETY PRECAUTIONS

Keep out of reach of children. Wear suitable protective clothing, gloves and eyes/face protection. After contact with skin, wash immediately with plenty of clean water. In case of contact with eyes rinse immediately with plenty of clean water and seek medical advice. Limited to professional use only.

For more details please refer the relevant Material Safety Data Sheet, available on request.



Pidilite Speciality Chemicals (BD) Pvt. Ltd.

Corporate Office: House No # B101 (North), Road No # 7, New DOHS Mohakhali, Dhaka 1206, Bangladesh.

• www.roff.in • Pidilite Toll Free No. **0800-0001110**

DISCLAIMER : While the company guarantees its products against defective materials, the use and application of these products are made without guarantee since the conditions of their application are beyond its control. It is recommended to verify with the company that the product is suitable for the intended use, and that this Data Sheet version is the latest one. The company may modify it without prior notice. Technical characteristics are listed for guidance only. For more information, please contact the company office in your location.